


THIS SCHEMATIC IS FURNISHED ONLY FOR TEST AND MAINTENANCE PURPOSES. THE CIRCUITS ARE PROPRIETARY IN NATURE AND SHOULD BE TREATED ACCORDINGLY. COPYRIGHT 1968 BY DIGITAL EQUIPMENT CORPORATION

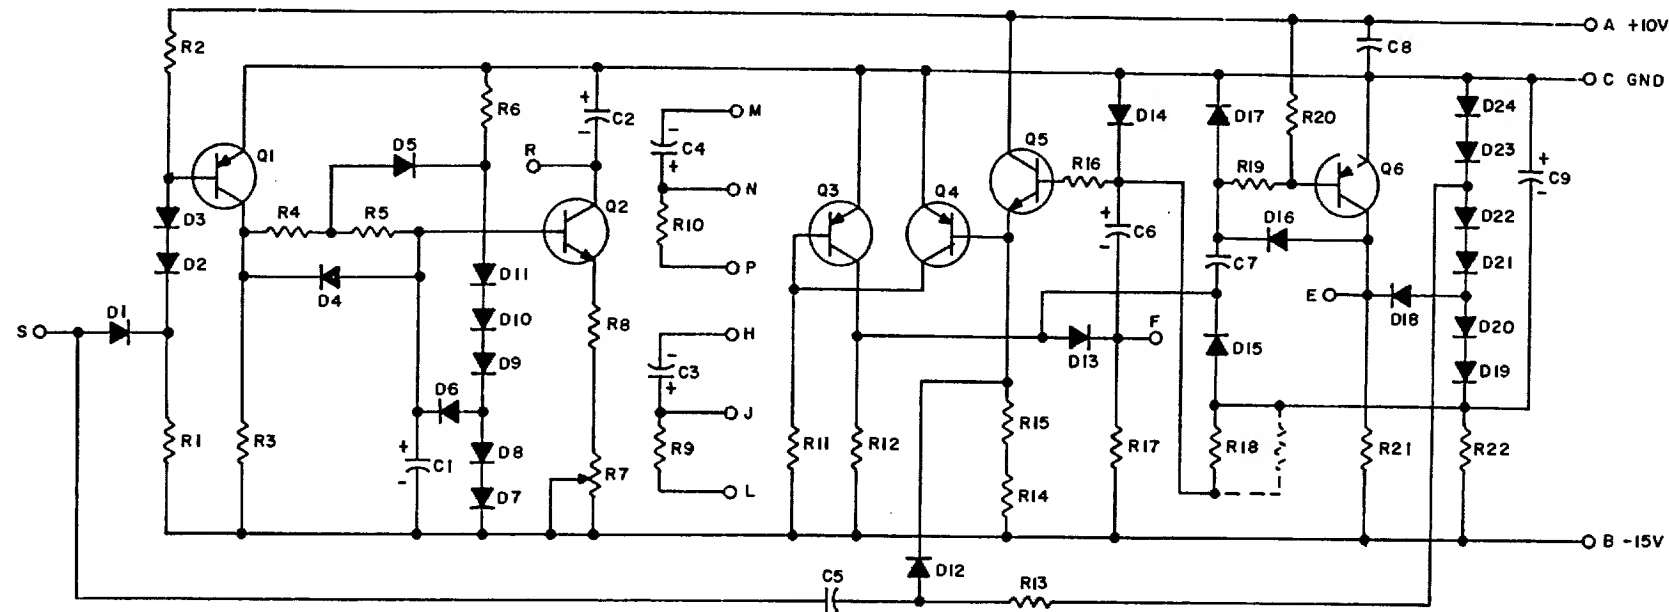

R9	RES. 12K 1/4W 5% CC	I300488
Q6	TRANSISTOR DEC2894-2B-S	I503098
Q3, Q4	TRANSISTOR DEC3639C	I502762-01
Q2, Q5	TRANSISTOR DEC30098-S	I503100
Q1	TRANSISTOR DEC6534C	I503409-02
R21	RES. 7.5K 1/4W 5% CC	I301422
R19	RES. 47 1/4W 5% CC	I300202
R18	RES. 6.8K 1/4W 5% CC	I301423
R16	RES. 100 1/4W 5% CC	I300229
R13, R20	RES. 10K 1/4W 5% CC	I300479
R11, R12, R22	RES. 1.5K 1/4W 5% CC	I300391
R10	RES. 3.3K 1/4W 5% CC	I300439
R8	RES. 330 1/4W 5% CC	I300295
R7	RES. 5K #275P POT	I305451
R5	RES. 1.2K 1/4W 5% CC	I301320
R3, R4, R6, R17	RES. 1K 1/4W 5% CC	I300365
R2	RES. 100K 1/4W 5% CC	I302466
R1, R14, R15	RES. 15K 1/4W 5% CC	I300496
D2, D3, D7-D11, D19-D24	DIODE D662	I100113
D1, D4-D6, D12-D18	DIODE D664	I100114
C9	CAP. 39MFD 10V 10% S.TANT	I000076
C8	CAP. .01MFD 100V 20% DISC	I001610
C7	CAP. 330MMF 100V 5% D.M.	I000023
C5	CAP. 100MMF 100V 5% D.M.	I000016
C4	CAP. 2.2MFD 20V 10%	I002627
C3	CAP. 3.9MFD 10V 10% S.TANT	I000064
C2, C6	CAP. 1MFD 35V 10% S.TANT	I001776
C1	CAP. 6.8MFD 35V 10%	I005306
PARTS LIST		A-PL-6913-O-O
REFERENCE DESIGNATION		PART NO.
DESCRIPTION		

REVISIONS
CHG NO. REV.

DEC FORM NO.
DRC 102

DRN. *M. Walker* DATE *6-9-68*
CHG. *5/10/68* DATE *5/10/68*
PROD. *5/27/68* DATE *5/27/68*

TRANSISTOR & DIODE CONVERSION CHART			
DEC	EIA	DEC	EIA
D662	1N645	DEC2894-2B	NONE
D664	1N3606		
DEC6534C	MP6534		
DEC30098	2N3009		
DEC3639C	2N3639		

DIGITAL
EQUIPMENT
CORPORATION
MAYNARD, MASSACHUSETTS

TITLE
CLOCK CONTROL G913
SIZE CODE NUMBER
C CS G913-0-1
PRINTED CIRCUIT REV. A

DIS 324 434 435

PINK